


five reasons why





draft free operation for airtight homes

Ethos unique flue system draws all its combustion air from outside the building, meaning the fire does not interact with the internal air. Ethos fires work perfectly in airtight environments, and in older buildings they reduce cold drafts so you'll feel warmer, longer.



a smarter designed firebox

Incoming air is preheated by the hot exhaust inner flue, delivering super heated combustion air. The specially designed firebox creates four distinct burn areas, delivering you more heat from the wood you burn and less smoke going up the chimney.



big things from a small package

Our compact firebox delivers similar heating power to much larger fires from other companies.

Take your room back with a powerful Ethos fire, and get more heat out while you burn less wood.



low emission and highly efficient

A hot fire is a clean fire, and Ethos fires are some of the cleanest.
Burn soft or hard woods with ease, and get more heat from less wood compared to other less efficient fires. Ideal for urban areas, the emissions from an Ethos fire are among the lowest in the market.



coloured to suit your room

Change the fire to fit your decor, not your decor to suit the fire.
With more than 160 colour options

With more than 160 colour options available you can customise the fire make a bold statement, or make your fire a more subtle appliance.

The choice is yours.

genesis



Freestanding Fire

Model	Description	RRP
FS100-xxxxx	Genesis Freestanding Woodfire (replace <i>xxxxx</i> with colour chart code)	
EXA-10003	EconAir 4.2m flue kit for Ethos freestanding fires	1,099

Genesis Performance

Estimated Peak Output: 18 kW Average Efficiency: 67%

Average Emissions: 1.3 g per kg Emissions per Output: 97 mg per MJ Tested and compliant to the following standards: AS/NZS 4012:1999 Power output and heating efficiency AS/NZS 4013:1999 Flue gas emissions AS/NZS 2918:2001 Safety



phoenix



Freestanding Fire

Model	Description	RRP
FS101-xxxxx	Phoenix Freestanding Woodfire (replace xxxxx with colour chart code)	4,799
EXA-10003	EconAir 4.2m flue kit for Ethos freestanding fires	1,099

Phoenix Performance

Estimated Peak Output: 18 kW
Average Efficiency: 69%
Average Emissions: 1.0 g per kg
Emissions per Output: 72 mg per MJ

Tested and compliant to the following standards: AS/NZS 4012:1999 Power output and heating efficiency AS/NZS 4013:1999 Flue gas emissions

kg AS/NZS 2918:2001 Safety







Freestanding Fire

Model	Description	RRP
FS105-xxxxx	Galaxy Freestanding Woodfire (replace xxxxx with colour chart code)	4,499
EXA-10003	EconAir 4.2m flue kit for Ethos freestanding fires	1,099

Galaxy Performance

Estimated Peak Output: 18 kW
Average Efficiency: 67%
Average Emissions: 1.3 g per kg
Emissions per Output: 97 mg per MJ

Tested and compliant to the following standards: AS/NZS 4012:1999 Power output and heating efficiency AS/NZS 4013:1999 Flue gas emissions

AS/NZS 2918:2001 Safety



ares



Floor Level Insert and Zero Clearance Fire

Model Description		RRP	
IS100-xxxxx	Ares Insert Woodfire (replace xxxxx with colour chart code)		
EXA-10004	EconAir 4.2m flue kit for Ethos insert fires	999	
Option - Zero Clearance Floor Level Installation			
EZC-031135	Zero Clearance Cabinet for timber framed insert install	1,299	
EXA-10042	EconAir 4.2m flue kit for Ethos insert fires using ZC-03-1135 Zero Clearance Kit (use in place of EXA-10004)	1,599	
EZC-031140	Zero Clearance Cabinet Base for timber floor installs only required if a concrete or other non-combustible base not available	999	

Ares Performance

Estimated Peak Output: 14 kW Average Efficiency: TBC Average Emissions: TBC Emissions per Output: TBC Tested and compliant to the following standards: AS/NZS 4012:1999 Power output and heating efficiency AS/NZS 4013:1999 Flue gas emissions AS/NZS 2918:2001 Safety



ares frame



Wall Mounted Zero Clearance Fire

Model	Description	RRP
IS102-xxxxx	Ares Full Frame Surround Insert Woodfire (replace xxxxx with colour chart code)	4,799
EZC-031135	Zero Clearance Cabinet for timber framed insert install	1,299
EXA-10042	EconAir 4.2m flue kit for Ethos insert Zero Clearance Kit	1,599
Option		
EZC-031140	Zero Clearance Cabinet Base for timber base installs Optional: Not required if the fire sits on a non-combustible base	999

Ares Performance

Estimated Peak Output: 14 kW Average Efficiency: TBC Average Emissions: TBC Emissions per Output: TBC Tested and compliant to the following standards: AS/NZS 4012:1999 Power output and heating efficiency AS/NZS 4013:1999 Flue gas emissions AS/NZS 2918:2001 Safety



flue accessories



Model	Description	RRP
EXS-11001	304 Stainless steel inner flue extension Φ130mm x 1200mm	129
EXS-11002	304 Stainless steel inner flue extension Φ130mm x 600mm	99
EXS-11014	Black painted galvanised outer liner Φ200mm x 1200mm	199
EXS-11007	Unpainted galvanised outer liner Φ200mm x 1200mm	89
EXS-11010	Unpainted galvanised outer liner Φ250mm x 1200mm	99
EXS-12001	Cowl cone for freestanding models	249
EXS-12002	Cowl cone for insert models	229
EXS-12010	Rotating cowl	169
EXS-13003	Ceiling plate black Φ200mm	99
EXS-13007	304 Stainless steel inner flue telescopic offset Φ130mm	249
EXS-13010	Spider bracket Φ130mm	39
EXA-10014	Black painted galvanised 180° flue shield for Φ200mm flue	349
EXS-11033	304 Stainless steel outer liner Φ200mm x 1200mm	189
EXS-11034	304 Stainless steel outer liner Φ250mm x 1200mm	199

coloured panel sets PACIFICGOLD





Model	Model Description	
CFS100-xxxxx	Genesis/Aquos coloured panel replacement set (replace xxxxx with colour chart code)	1,099
CFS101-xxxxx	Phoenix coloured body replacement (replace xxxxx with colour chart code)	
CFS105-xxxxx	Galaxy coloured body replacement (replace xxxxx with colour chart code)	1,099
CIS100-xxxxx	Ares coloured facia replacement (replace xxxxx with colour chart code)	1,099
CIS102-xxxx	Ares Picture Frame coloured facia replacement (replace xxxxx with colour chart code)	1,399

replacement parts




Model	Description	RRP
EEP-50032	Air control knob (all models)	30
EEP-50037	Door knob (all models)	35
EEM-90004	Door glass (all models)	249
EES-10102	Door glass retainer (all models)	129
EES-10101	Door frame only (all models)	1099
EXS-11010	Door latch assembly (all models)	169
EEM-90005	Door rope seal (all models)	149
EES-10100	Complete door unit (all models)	1299
EEP-50118	Air tube retaining clip (all models)	12
EEP-50045	Top air tube (<u>Genesis</u> model only)	199
EEP-50043	Top air tube (<u>Phoenix</u> and <u>Ares</u> models only)	199
EEP-50044	Rear air tube (<u>Phoenix</u> and <u>Ares</u> models only)	199
EES-10006	Front bottom air deflector, stainless steel (all models)	249
EEP-50061	Top grill black section (<u>Genesis</u> model only)	349
EES-10016	Replacement fire poker (all models)	79
EEA-FSK	Reusable firelighter kit (incl 2 blocks, bottle and tongs)	69
EES-10600	Reusable fire starter blocks only (2 Pcs)	29

replacement fire bricks

Model	Description	RRP
EEP-50119	Top baffle replacement (all models)	119
EEM-90002	Side fire brick 230mm x 115mm x 40mm (ea)	35
EEM-90025	Bottom fire brick 230mm x 115mm x 25mm (ea)	35
EEP-50030	Bottom fire brick 115mm x 115mm x 25mm (ea)	35

freestanding clearances



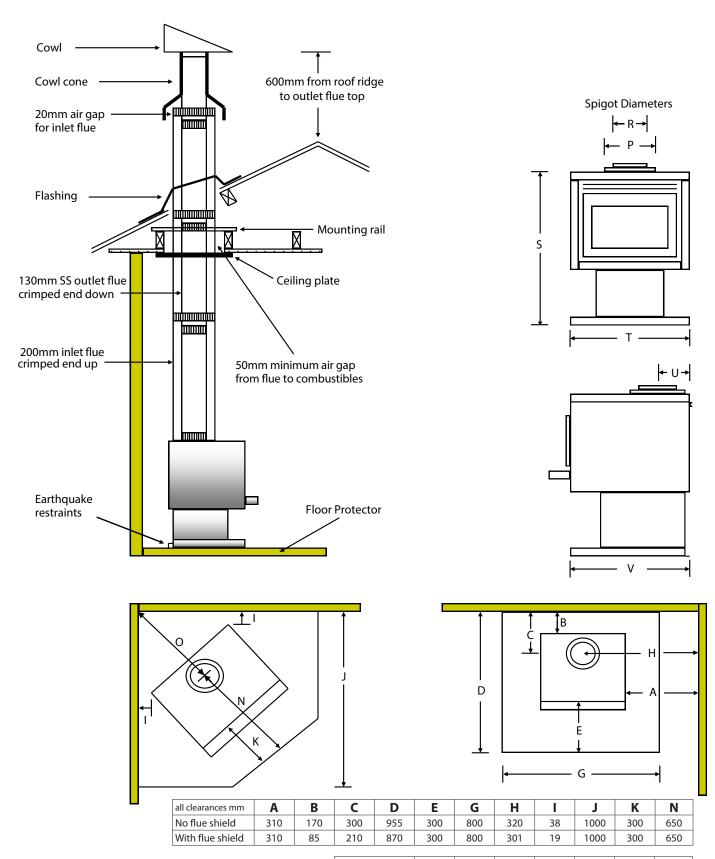



IMPORTANT: It is the responsibility of the installer to ensure that the installation of this appliance complies with AS/NZS 2918, The above installation diagrams are provided as a guide only.

all dims mm	0	Р	R	S	Т	U	V
Genesis / Galaxy	200	130	740	540	130	485	-
Phoenix	200	130	670	540	130	485	-

flue kit details

No fasteners required







This Flue Kit must be installed by a suitably qualified tradesperson or a solid fuel heater installer.

* This kit may require additional components to complete installation.

130mm flue cut min 25mm


Roof & Ceiling Installation

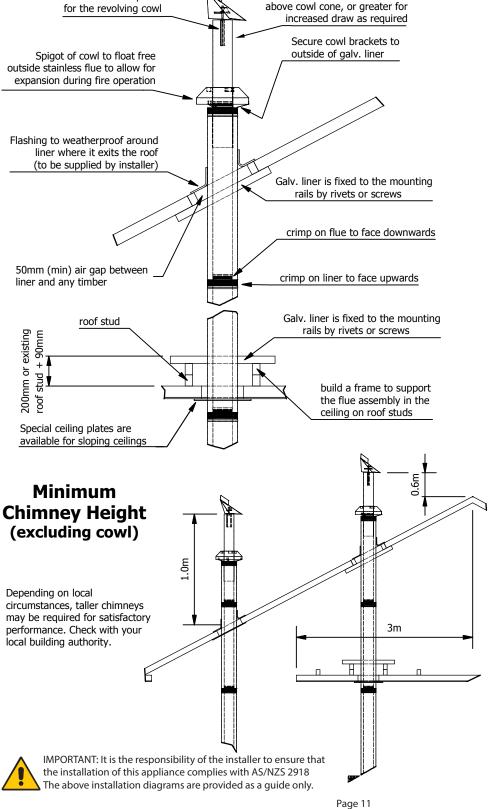

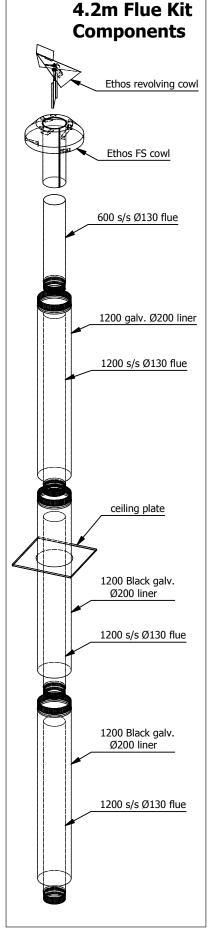

insert clearances



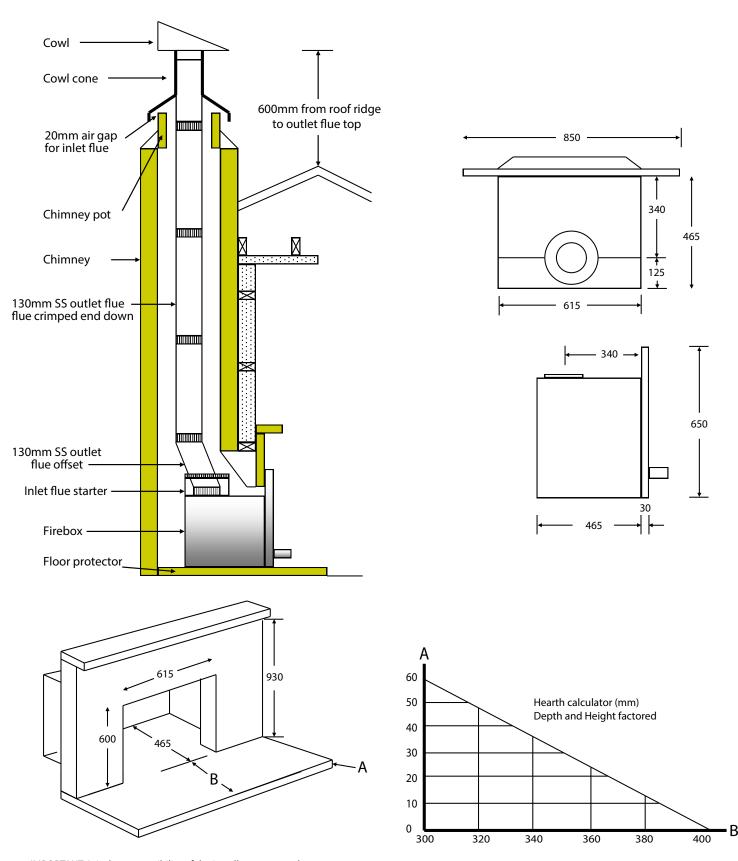



IMPORTANT: It is the responsibility of the installer to ensure that the installation of this appliance complies with AS/NZS 2918 The above installation diagrams are provided as a guide only.